

## FASET – Tool Box Talk No. 6 (11<sup>th</sup> September 2015)

# Single Gravlock Use



Figure 1

The practice of using single scaffold girder clamp-coupler or part of them to attach or hook a Safety Net to the bottom flange of a beam or similar structure is prohibited.

Safety Nets must not be installed as shown in Figure 1.

Scaffold girder clamps are designed to be used in pairs with a scaffold butt/tube attached between the two clamps as shown in Figures 2 and 3.

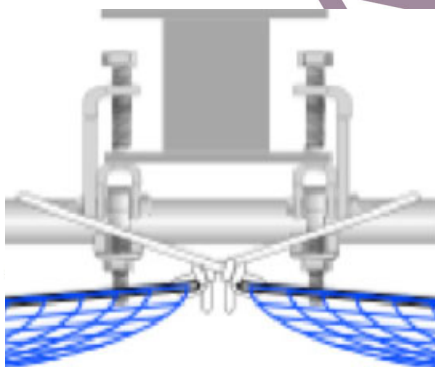


Figure 4

The clamps must be attached to both sides of the steel work and the Safety Net attached to the scaffold butt/tube as illustrated in Figure 4.



Figure 2



Figure 3

For more information about FASET, contact:

FASET  
PO BOX 138, WHITCHURCH  
SHROPSHIRE. SY13 9AD

T +44 (0)1948 780652  
E [enquiries@faset.org.uk](mailto:enquiries@faset.org.uk)  
W [www.faset.org.uk](http://www.faset.org.uk)

**FASET**  
Fall Arrest Safety Equipment Training